

S  
P  
E  
C  
I  
A  
L

# Model 400 3-Way Valve

Earthquake Actuated 3-Way Valve




The Model 400 earthquake actuated 3 way valve offers a redirection of dry air or nitrogen from the pressure ( n/o ) to the exhaust ( n/c ) port during a seismic event. Reset is simple using a flat blade screw driver and the valve status window, see included instructions.

Using an aluminum body, with steel and brass parts, coupled with PSP's proprietary patented seismic triggering technology the model 400 3-Way valve will provide many years of dependable seismic protection.

Typical applications include

## Specifications

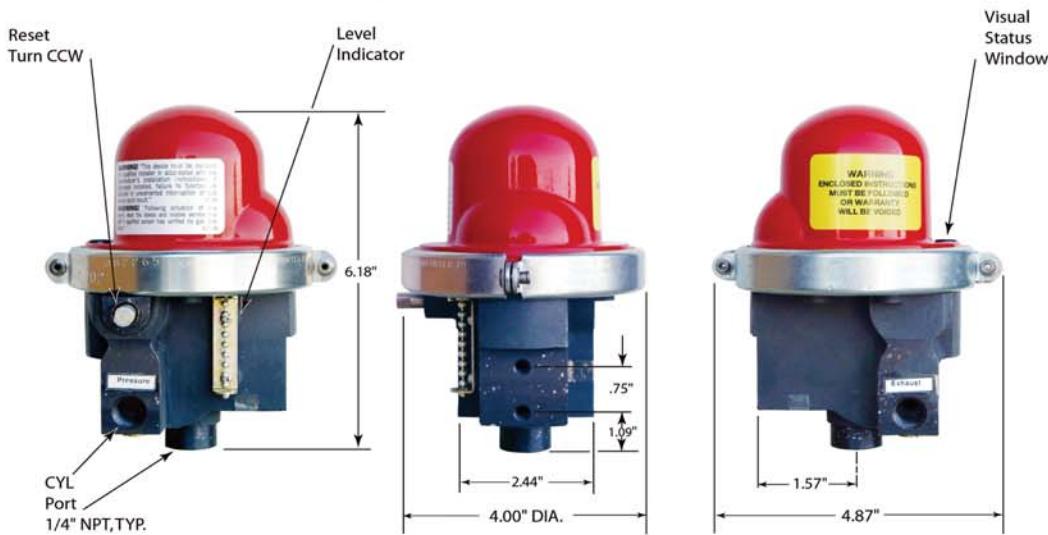

**Warning: For Use With Dry Air or Nitrogen Only ( No Plant Air )**

**Leakage: External**

None, with 100 psi internal pressure for 60 seconds, n/c & n/o ports plugged

**Ports: All Ports 1/4" NPT**

**Leakage: Internal ( Tripped Condition )**

None, with 80 psi internal pressure for 30 seconds, normally open port

**Leakage: Normally Closed Port ( Latched Condition )**

None, with 80 psi to normally closed port for 60 seconds



**Alliance  
International  
Company, Inc.**

[www.AllianceInternationalCo.com](http://www.AllianceInternationalCo.com)

Toll Free 866-422-8258

Tel 310-472-7592

Toll Free 866-776-8258

Fax 310-472-5276